







Electric ride-on/pedestrian pallet truck

ERE 120-230

Lift height: 122 mm / Load capacity: 2000-3000 kg

JUNGHEINRICH

ERE 120-230

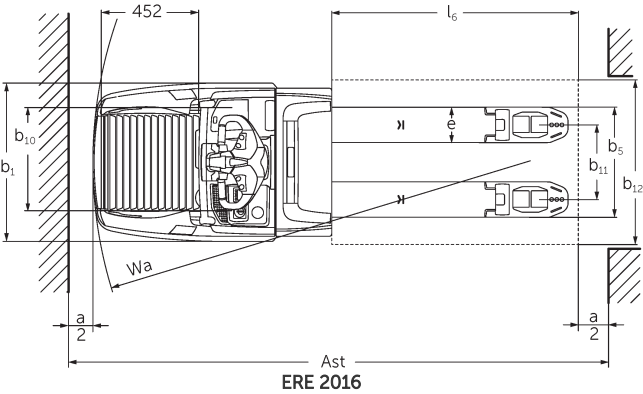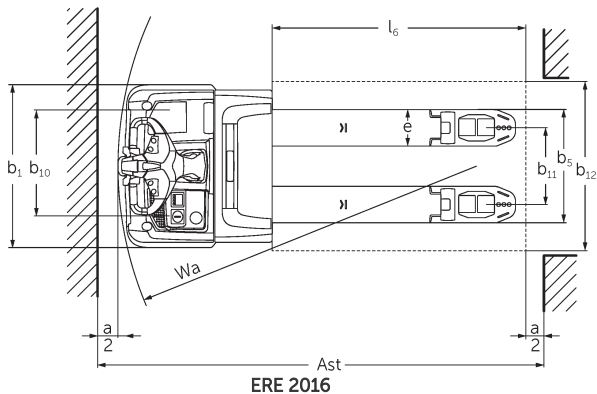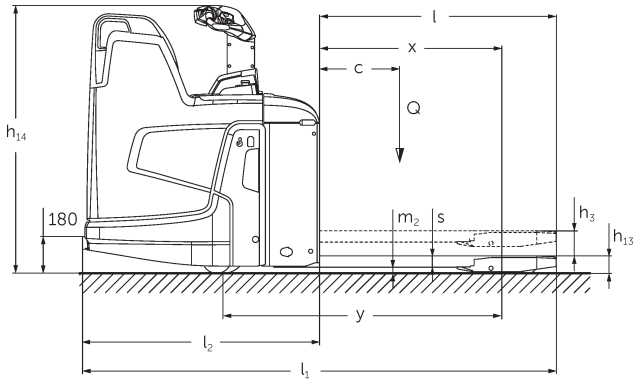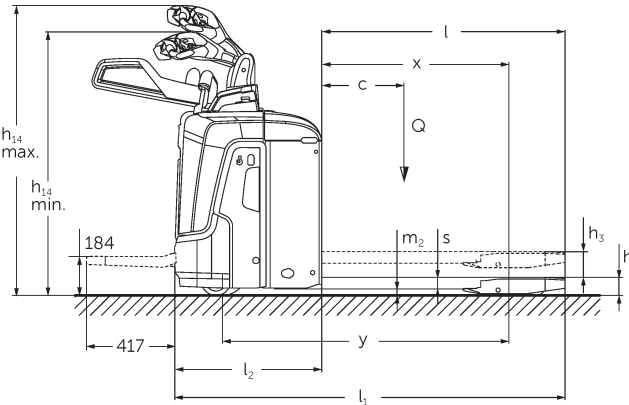

VDI table

Characteristic	1.1	Manufacturer (abbreviated description)		Jungheinrich						
	1.2	Manufacturer's type designation		ERE 120 6km/h	ERE 120 9 km/h	ERE 125	ERE 225	ERE 225 drivePLUS	ERE 230	
	1.3	Drive type		electric						
	1.4	Operation		Tiller						
	1.5	Load capacity/load	Q kg	2000		2500			3000	
	1.6	Load centre distance	c mm	600						
	1.8	Load distance, centre of drive axle to fork	x mm	908						
	1.9	Wheelbase	y mm	1378						1450
Weights	2.1	Netto weight		400		404			424	
	2.1.1	Service weight (incl. battery)		630		634			721	
	2.2	Axle load laden front/rear		795 / 1825		1126 / 2090			1239 / 2494	
	2.3	Axle load unladen front/rear		474 / 138		550 / 159			565 / 160	
Wheels/suspension system	3.1	Tyres		Vulkollan ®/PU + quartz/Vulkollan ®						
	3.2	Tyre size, front		Ø 230 x 65		Ø 230 x 77				
	3.3	Tyre size, rear		Ø 85 x 110 / Ø 85 x 85						Ø 85 x 85
	3.4	Additional wheels		Ø 140 x 57						
	3.5	Wheels, number front/back (x=driven)		1x +2/2 oder 4						1x +2/4
	3.6	Tread width, front	b10 mm	363						
	3.7	Tread width, rear	b11 mm	512						
Basic dimensions	4.4	Lift (h3)	h3 mm	122						
	4.9	Height of tiller handle in drive position min./max.	h14 mm	1137 / 1419						
	4.15	Height, lowered	h13 mm	85						
	4.19	Total length	l1 mm	1847					1919	
	4.20	Length including fork shank	l2 mm	697					769	
	4.21.1	total width	b1 mm	770						
	4.22	Fork dimensions	s/ e/l mm	55 x 172 x 1150						
	4.25	Width across forks	b5 mm	535						
	4.32	Ground clearance centre of wheelbase	m2 mm	30						
	4.34.1	Aisle width (pallet 1000x1200 sideways)	Ast mm	2411					2483	
	4.34.2	Aisle width (pallet 800x1200 length)	Ast mm	2299					2372	
	4.34.8	Aisle width (pallet 800x1200 crosswise)	Ast mm	2414					2486	
	4.35	Turning radius	Wa mm	1604					1677	

Performance data	5.1	Travel speed laden/unladen	km/h	6 / 6	8 / 9	9 / 9	9.5 / 12.5	9.5 / 14	6 / 12.5
	5.2	Lift speed laden/unladen	m/s	0.04 / 0.04		0.05 / 0.07			
	5.3	Lowering speed laden/unladen	m/s	0.05 / 0.04		0.05 / 0.05			
	5.8	Max. gradeability laden/unladen	%	5 / 7	8 / 16				6 / 16
	5.10	Service brake		generative					
E-motor/Electronics	6.1	Drive motor, performance S2 60 min	kW	2		2.8		3.2	2.8
	6.2	Lift motor, performance with S3	kW	1.2		2.2			
	6.3	Battery according to DIN 43531/35/36		B	-				B
	6.4	Battery voltage/nominal capacity	V / Ah	24 / 250					24 / 375
	6.5	Battery weight	kg	230					297
	6.6.1	Energy consumption according to EN cycle	kWh/h	0.4	0.43	0.4	0.35	0.39	0.36
	6.6.2	CO2 equivalent as per EN 16796	kg/h	0.2					
	6.7	Throughput	t/h	114	142	156	184	222	220
	6.8.1	Energy consumption with max. throughput	kWh/h	0.74	1.11	1.18	1.29	1.89	1.45
Other	8.1	Type of drive control		AC					
	10.7	Schalldruckpegel nach EN12053	dB (A)	63			64	67	64

- This data sheet according to VDI guideline 2198 only states the technical values of the standard truck. Different tyres, other masts, additional equipment etc. may result in different values.

Characteristic	1.1	Manufacturer (abbreviated description)			Jungheinrich	
	1.2	Manufacturer's type designation			ERE 230 drivePLUS	
	1.3	Drive type			electric	
	1.4	Operation			Tiller	
	1.5	Load capacity/load	Q	kg	3000	
	1.6	Load centre distance	c	mm	600	
	1.8	Load distance, centre of drive axle to fork	x	mm	908	
	1.9	Wheelbase	y	mm	1450	
Weights	2.1	Netto weight			kg	424
	2.1.1	Service weight (incl. battery)			kg	721
	2.2	Axle load laden front/rear			kg	1239 / 2494
	2.3	Axle load unladen front/rear			kg	565 / 160

Wheels/suspension system	3.1	Tyres		Vulkollan ®/PU + quartz/Vulkollan ®
	3.2	Tyre size, front		Ø 230 x 77
	3.3	Tyre size, rear		Ø 85 x 85
	3.4	Additional wheels		Ø 140 x 57
	3.5	Wheels, number front/back (x=driven)		1x +2/4
	3.6	Tread width, front	b10 mm	363
	3.7	Tread width, rear	b11 mm	512
Basic dimensions	4.4	Lift (h3)	h3 mm	122
	4.9	Height of tiller handle in drive position min./max.	h14 mm	1137 / 1419
	4.15	Height, lowered	h13 mm	85
	4.19	Total length	l1 mm	1919
	4.20	Length including fork shank	l2 mm	769
	4.21.1	total width	b1 mm	770
	4.22	Fork dimensions	s/e/l mm	55 x 172 x 1150
	4.25	Width across forks	b5 mm	535
	4.32	Ground clearance centre of wheelbase	m2 mm	30
	4.34.1	Aisle width (pallet 1000x1200 sideways)	Ast mm	2483
	4.34.2	Aisle width (pallet 800x1200 length)	Ast mm	2372
	4.34.8	Aisle width (pallet 800x1200 crosswise)	Ast mm	2486
	4.35	Turning radius	Wa mm	1677
Performance data	5.1	Travel speed laden/unladen	km/h	6 / 14
	5.2	Lift speed laden/unladen	m/s	0.05 / 0.07
	5.3	Lowering speed laden/unladen	m/s	0.05 / 0.05
	5.8	Max. gradeability laden/unladen	%	6 / 16
	5.10	Service brake		generative
E-motor/Electronics	6.1	Drive motor, performance S2 60 min	kW	3.2
	6.2	Lift motor, performance with S3	kW	2.2
	6.3	Battery according to DIN 43531/35/36		B
	6.4	Battery voltage/nominal capacity	V / Ah	24 / 375
	6.5	Battery weight	kg	297
	6.6.1	Energy consumption according to EN cycle	kWh/h	0.41
	6.6.2	CO2 equivalent as per EN 16796	kg/h	0.2
	6.7	Throughput	t/h	266
	6.8.1	Energy consumption with max. throughput	kWh/h	2.05
Other	8.1	Type of drive control		AC
	10.7	Schalldruckpegel nach EN12053	dB (A)	67

- This data sheet according to VDI guideline 2198 only states the technical values of the standard truck. Different tyres, other masts, additional equipment etc. may result in different values.

The values in the table apply to the folding stand-on platform (folded up), M-LBE battery compartment, fork length 1,150 mm, raised support arm lift.

- VDI no. 1.8: lowered load section: $x + 56$ mm.
- VDI no. 1.9: lowered load section: $y + 56$ mm. With M-VBE, L-LBE & L high-LBE battery compartment: $y + 72$ mm; L-VBE: $y + 125$ mm.
- VDI no. 2.1: with lateral battery exchange: $+ 25$ kg.
- VDI no. 4.19: with M-VBE, L-LBE & L high-LBE battery compartment: $l1 + 72$ mm; L-VBE: $l1 + 125$ mm. With folding platform folded down: $l1 + 416$ mm; compact, fixed platform: $l1 + 357$ mm; extended, fixed platform: $l1 + 472$ mm; L platform: $l1 + 477$ mm.
- VDI no. 4.20: with M-VBE, L-LBE & L high-LBE battery compartment: $l2 + 72$ mm; L-VBE: $l2 + 125$ mm. With folding platform folded down: $l2 + 416$ mm; compact, fixed platform: $l2 + 357$ mm; extended, fixed platform: $l2 + 472$ mm; L platform: $l2 + 477$ mm.
- VDI no. 4.34.1: lowered load section: aisle width $+ 50$ mm. with folding platform folded down: aisle width $+ 416$ mm; compact, fixed platform: aisle width $+ 357$ mm; extended, fixed platform: aisle width $+ 472$ mm; L platform: aisle width $+ 477$ mm.
- VDI no. 4.34.2: with folding platform folded down: aisle width $+ 416$ mm; compact, fixed platform: aisle width $+ 357$ mm; extended, fixed platform: aisle width $+ 472$ mm; L platform: aisle width $+ 477$ mm.
- VDI no. 4.34.8: lowered load section: aisle width $+ 68$ mm. with folding platform folded down: aisle width $+ 416$ mm; compact, fixed platform: aisle width $+ 357$ mm; extended, fixed platform: aisle width $+ 472$ mm; L platform: aisle width $+ 477$ mm.
- VDI no. 4.35: lowered load section: $Wa + 56$ mm.
With M-VBE, L-LBE & L high-LBE battery compartment: $Wa + 72$ mm; L-VBE: $Wa + 125$ mm. with folding platform folded down: $Wa + 416$ mm; compact, fixed platform: $Wa + 357$ mm; extended, fixed platform: $Wa + 472$ mm; L platform: $Wa + 477$ mm.
- VDI no. 5.1: ERE 230: 9.5 km/h with 2.5 t load.

The German production facilities in
Norderstedt, Moosburg and Landsberg
are certified as well as our Genuine Parts
Center in Kaltenkirchen.

ISO 9001
ISO 14001

Jungheinrich fork lift trucks meet
European safety requirements.



 **JUNGHEINRICH**