




Electric tow tractor **EZS 7280 NA**


Towing capacity: 28000 kg



EZS 7280 NA

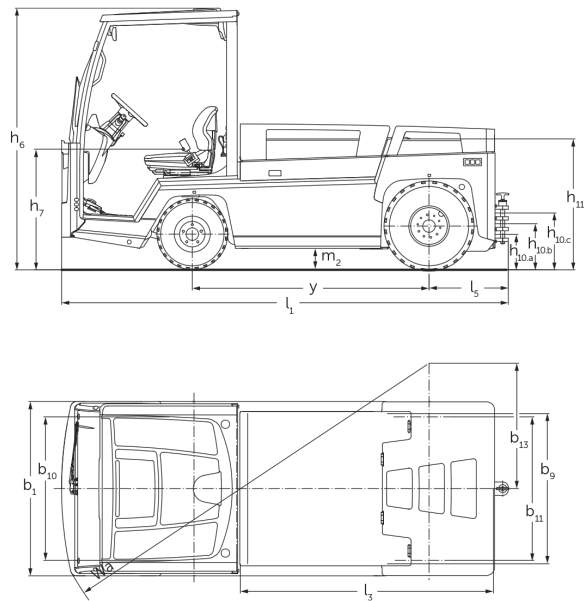

Zugfähigkeit

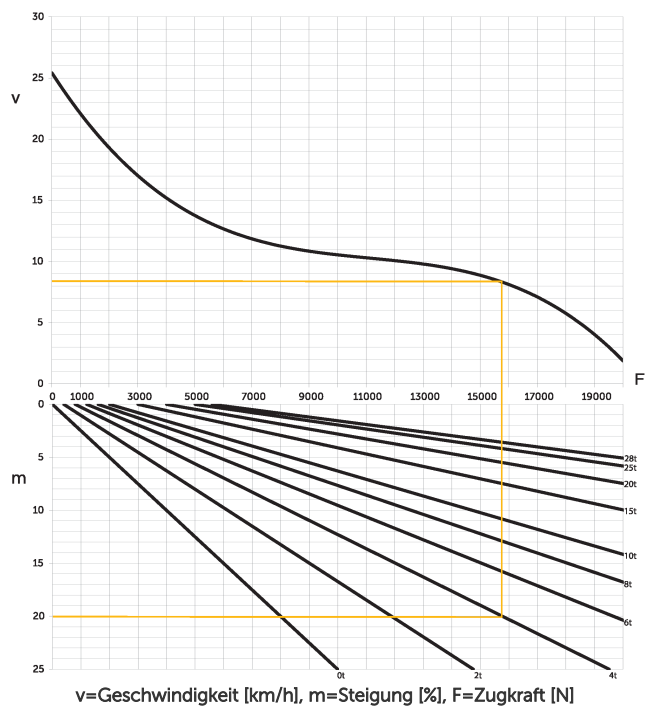

VDI table

Characteristic	1.1	Manufacturer (abbreviated description)		Jungheinrich
	1.2	Manufacturer's type designation		EZS 7280
	1.3	Drive type		electric
	1.4	Operation		Seat
	1.5.3	Towing capacity	Q kg	28000
	1.7	Rated drawbar pull	N	5600
	1.9	Wheelbase	y mm	1465
Weights	2.1	Netto weight	kg	4088
	2.3	Axle load unladen front/rear	kg	2100 / 1988
Wheels/chassis	3.1	Tyres		Air
	3.2	Tyre size, front		6.00 R9
	3.3	Tyre size, rear		7.00 R12
	3.5	Wheels, number front/back (x=driven)		2/2x
	3.6	Tread width, front	b10 mm	1070
	3.7	Tread width, rear	b11 mm	1070
Basic dimensions	4.7	Height of overhead guard (cab)	h6 mm	1970
	4.8	Seat height/stand height	h7 mm	880
	4.12	Coupling height	h10 mm	240
	4.12.1	2. Coupling height	mm	320
	4.12.2	3. Coupling height	mm	400
	4.13	Loading height, unladen	mm	1000
	4.16	Loading area length	l3 mm	1536
	4.17	Overhang length	mm	610
	4.18	Loading area width	b9 mm	1090
	4.19	Total length	l1 mm	3045
	4.21.1	total width	b1 mm	1300
	4.32	Ground clearance centre of wheelbase	m2 mm	150
	4.35	Turning radius	Wa mm	2847
	4.36	Smallest pivot point distance	b13 mm	935
Performance data	5.1	Travel speed laden/unladen	km/h	12 / 25
	5.1.1	Reverse travel speed with/without load	km/h	10 / 10
	5.5	Drawbar pull laden	N	5600
	5.6	Max. drawbar pull laden/unladen	N	19000 / 19000
	5.10	Service brake		hydraulic/electric

Electric motor/electronics	6.1	Drive motor, performance S2 60 min	kW	20
	6.4	Battery voltage/nominal capacity	V / Ah	80 / 620
	6.5	Battery weight	kg	1560
	6.6	Energy consumption according to VDI cycle	kWh/h	0
Other	8.1	Type of drive control		3-phase AC technology
- This data sheet according to VDI guideline 2198 only states the technical values of the standard truck. Different tyres, other masts, additional equipment etc. may result in different values.				

- VDI no. 4.12: the value for the coupling height applies to a triple coupling
- VDI no. 4.19: the specification for the overall length includes a triple coupling
- VDI no. 5.1: with a towing capacity of 25 t, the travel speed is 13 km/h
- VDI no. 10.7: the specification applies with deactivated ventilation / heating

Jungheinrich

Lift Truck Corp.

2121 West Sam Houston Pkwy. N.
Houston, TX 77043-2305

The German production facilities in
Norderstedt, Moosburg and Landsberg
are certified as well as our Genuine Parts
Center in Kaltenkirchen. ISO 9001
ISO 14001

